


CLASSICS™ 1" ALUMINUM BLINDS

Product Specifications

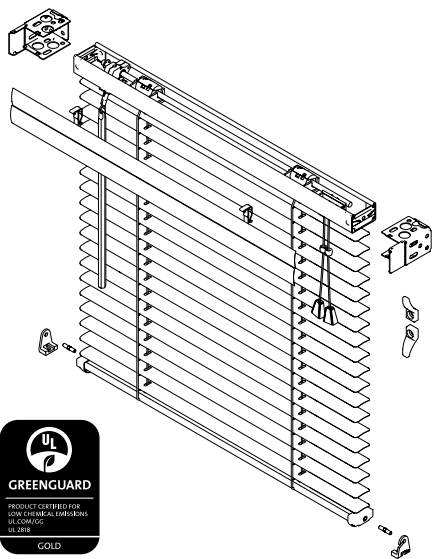

Product Features and Benefits

- Cost-efficient, durable performance
- Extra heavy-duty steel 1" x 1½" headrail allows greater blind widths or up to three blinds on one headrail
- Enclosed bottomrail
- Disengaging clutch and crash-proof cordlock
- Compliant with ANSI WCMA A100.1-2018 standard for cord length.
- Antistatic performance to repel dust
- Low HAP, low VOC paint process
- Slats meet NFPA 701
- GREENGUARD Gold certified
- Limited lifetime warranty

Identical to Bali® Classics™ 1" Aluminum Blinds

Headrail shall be 1" high x 1½" wide x .025" thick U-shaped steel. The steel finishing process includes phosphate treatment for corrosion resistance, a chrome-free sealer, a low HAP urethane primer, and a topcoat of low HAP polyester-baked enamel.

Tilter shall be made of injection-molded thermoplastics for smooth low-friction operation and shall incorporate a clutch mechanism to prevent damage due to overtilting.

Tilt rod shall be electro-zinc coated solid steel measuring ¼" square.

Tilt wand shall be clear polycarbonate with a hexagonal cross section measuring approximately ¼" diameter and attached to the tilter shaft by means of a spring clip for easy removal.

Cordlock shall be a snap-in design made of durable high-impact nylon with a stainless steel wear guard incorporating a floating shaft-type locking pin. The design provides a crash-proof safety feature that will lock the blinds automatically upon release of the lift cord.

Drum and cradles shall be low-friction thermoplastic and provided for each ladder.

Installation brackets shall be made of phosphate-treated steel with a urethane primer and polyester-baked enamel finish to match headrail. The design shall incorporate a hinged front cover.

Braided ladder shall be made of 100% polyester yarn, incorporating two extra-strength rungs per ladder for slat support. Standard ladder spacing shall be 21.5 mm.

Slats shall be 5000 series cold-rolled aluminum containing the maximum allowable recycled content to produce a high-strength and corrosion-resistant flexible product. Slats shall be nominally 1" wide x .006" thick and processed to provide a smooth, hard, less porous surface with antistatic performance to repel dust. Slats shall be treated with a topcoat of polyester-baked enamel.

Bottomrail shall be a completely enclosed tubular shape made of phosphate-treated steel for corrosion resistance and finished with a chrome-free sealer, low HAP urethane primer, and a topcoat of low HAP, polyester-baked enamel. Bottomrail shall measure .025" thick.

Options:

- .008" thick slat
- 20 mm ladder spacing
- 22.5 mm ladder spacing
- Perforated slat
- Tilt limiter
- Cord tilt
- Ring tilt
- Top-lock cordlock
- Ring pull
- Turn clips for extruded pocket
- Extension brackets
- Hold down brackets
- Cut-outs
- Two-slat valance
- Deluxe two-slat valance
- Specialty shapes (arches, circles, and angles)
- Custom cord lengths available